


>STAINLESS BALL VALVES :>

MODEL -RV- S1PE



1Pce Reduced Bore

Size : 8-50mm

For Chemical and Industrial applications

Blow-out Proof Stem Design

100% tested air under water

Specifications

Pressure Rating 1000Psi WOG

Temperature Range -20 to 450F


End Types : Threaded

| ITEM | DESCRIPTION | MATERIAL |
|------|---------------|----------|
| 1 | Body | 316 |
| 2 | Body Insert | 316 |
| 3 | Ball | 316 |
| 4 | Seats | PTFE |
| 5 | Stem | 316 |
| 6 | Thrust Washer | PTFE |
| 7 | Stem Packing | PTFE |
| 8 | Packing Gland | 304 |
| 9 | Lever Nut | 304 |
| 10 | Lever | 304 |
| 11 | Sleeve | Plastic |
| 12 | | |

| ITEM | 8mm | 10mm | 15mm | 20mm | 25mm | 32mm | 40mm | 50mm | |
|--------|--------|--------|--------|--------|--------|--------|--------|------|--|
| L | 48mm | 48mm | 55mm | 59mm | 70mm | 75mm | 83 | | |
| Wgt/kg | 0.07kg | 0.10kg | 0.16kg | 0.30kg | 0.36kg | 0.58kg | 0.76kg | | |

Weight Not Including Locking device

MODEL -RV- S2PE

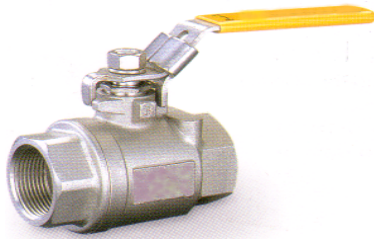

2Pce Full Bore

Size : 8-100mm

For Chemical and Industrial applications

Blow-out Proof Stem Design

100% tested air under water

Specifications

Pressure Rating 1000Psi WOG

Temperature Range -20 to 450F

End Types : Threaded

| ITEM | DESCRIPTION | MATERIAL |
|------|---------------|----------|
| 1 | Body | 316 |
| 2 | Body Insert | 316 |
| 3 | Ball | 316 |
| 4 | Seats | PTFE |
| 5 | Stem | 316 |
| 6 | Thrust Washer | PTFE |
| 7 | Stem Packing | PTFE |
| 8 | Packing Gland | 304 |
| 9 | Lever Nut | 304 |
| 10 | Lever | 304 |
| 11 | Sleeve | Plastic |

| ITEM | 15mm | 20mm | 25mm | 32mm | 40mm | 50mm | 65mm | 80mm | 100mm |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| L | 55mm | 59mm | 70mm | 75mm | 83 | 115mm | 140mm | 168mm | 200mm |
| Wgt/kg | 0.16kg | 0.30kg | 0.36kg | 0.58kg | 0.76kg | 1.85kg | 3.80kg | 6.00kg | 10.40kg |

Weight Not Including Locking device

MODEL -RV- S3PE



3Pce Full Bore

Size : 8-100mm

For Chemical and Industrial applications

Blow-out Proof Stem Design

100% tested air under water

Specifications

Pressure Rating 1000Psi WOG

Temperature Range -20 to 450F

End Types : Threaded

| ITEM | DESCRIPTION | MATERIAL |
|------|---------------|----------|
| 1 | Body | 316 |
| 2 | Body Insert | 316 |
| 3 | Ball | 316 |
| 4 | Seats | PTFE |
| 5 | Stem | 316 |
| 6 | Thrust Washer | PTFE |
| 7 | Stem Packing | PTFE |
| 8 | Packing Gland | 304 |
| 9 | Lever Nut | 304 |
| 10 | Lever | 304 |
| 11 | Sleeve | Plastic |

| ITEM | 15mm | 20mm | 25mm | 32mm | 40mm | 50mm | 65mm | 80mm | 100mm |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
| L | 73mm | 84mm | 85mm | 120mm | 122mm | 130mm | 170mm | 185mm | 260mm |
| Wgt/kg | 0.64kg | 0.88kg | 0.88kg | 2.50kg | 2.30kg | 6.75kg | 6.75kg | 8.00kg | 16kg |

Weight Not Including Locking device