

AIR TANK

Series AT

Cat No AT - 01 - 01 - A

AIR TANK (STAINLESS STEEL) - 0.75, 2, 5, 10, 20 L

Features

- Attractive and clean design
- Available with drain ports
- SS304 material for corrosion resistance



Applications

- Compressed air braking system in railway rolling stock, commercial vehicles
- Air suspension systems in automotive application
- Pulsation dampening and high cycle applications in automation and machine tools
- Systems to safely shutdown in an emergency situation
- Testing of products


Technical Specifications

Standard size*	(L)	0.75	2	5	10	20
Fluid		Compressed Air, Nitrogen #				
Operating pressure	bar	0.5 to 16				
Ambient / Medium temperature	C	-10° to 100°				
Thread connection		Female : G - Parallel thread				
Type of mounting		Through holes				
Installation position		Any position		Condensate drain downwards		
Materials of construction		SS304				

* - for Non-standard, contact your regional dealer or **JANATICS**

- for other fluids, contact **JANATICS**

For 0.75L & 2 L

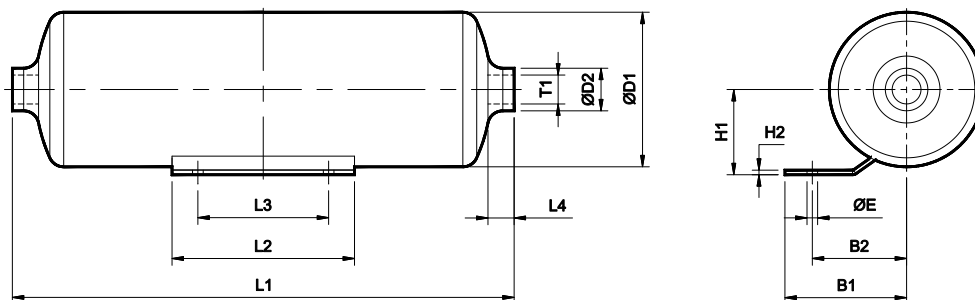


Size	ØD1	ØD2	L1	L2	L3	L4	T1	B1	B2	H1	H2	ØE	Ordering No
0.75L	73	19	250	100	60	15	G1/4	55	42	40	3	4.5	AT0075S061061BS
2L	102	28	330	120	86	17	G1/2	80	62	56	3	7	AT0200S063063BS

AIR TANK

Series AT

Cat No AT - 01 - 01 - A

For 5L, 10L & 20 L

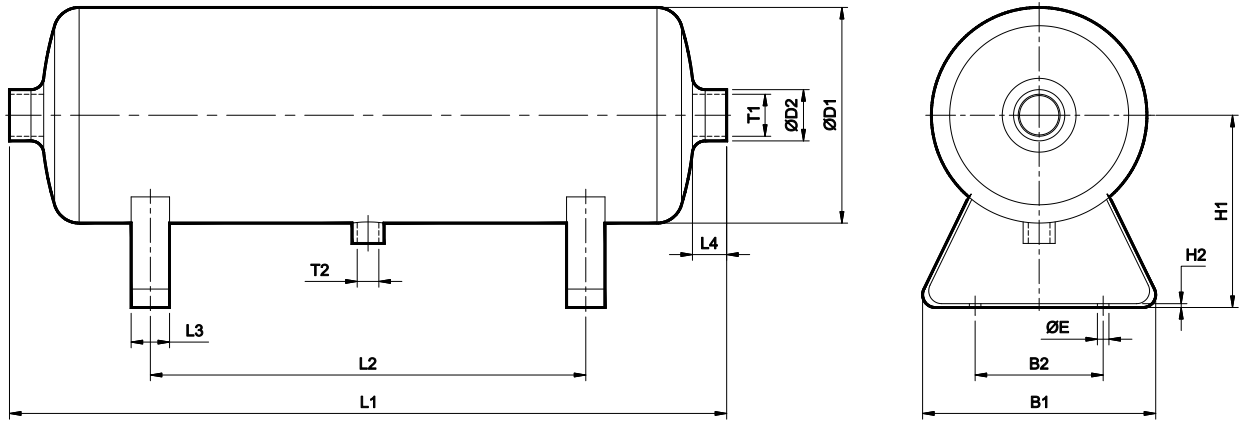

Size	ØD1	ØD2	L1	L2	L3	L4	T1	T2	B1	B2	H1	H2	ØE	Ordering No
5L	168	40	310	150	30	22	G1	G3/8	172	90	140	3	9	AT0500S065065062AS
10L	168	40	560	340	30	28	G1	G3/8	182	100	150	3	9	AT1000S065065062AS
20L	219	40	680	400	40	30	G1	G3/8	202	110	180	3	12	AT2000S065065062AS

How to order

While ordering Air Tank, mention the Ordering number given in the corresponding tables.